

SECTION TWO

Radio installation



Receiver Hardware Installation

1) Remove all items from packing material.

AC Line Cord


Serial Cable



Radio and power supply in packing box

- 2) Place radio and power supply unit on work surface. Turn unit so rear of radio is visible.


Antenna
Connector

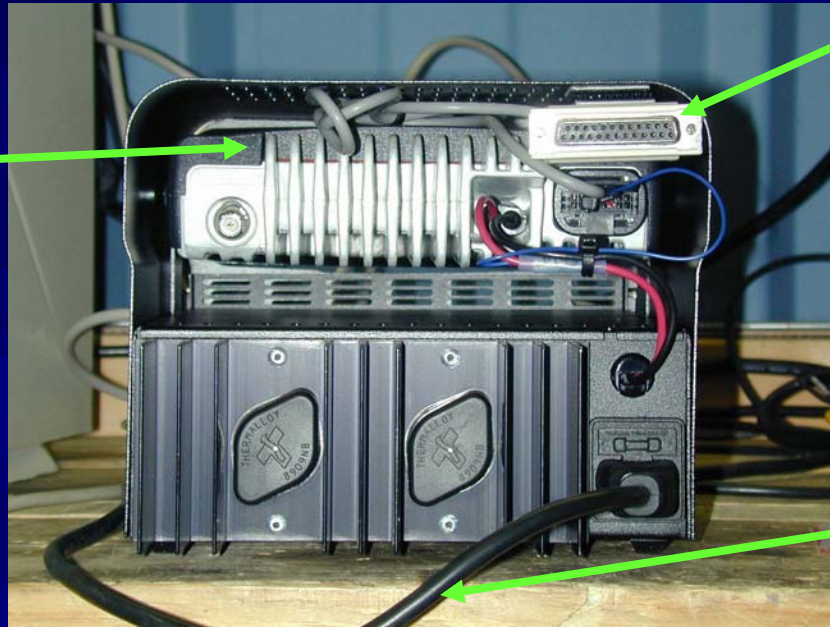

Demodulator

AC Line Cord

3) Connect large end of serial cable (25 pin connector) to demodulator.

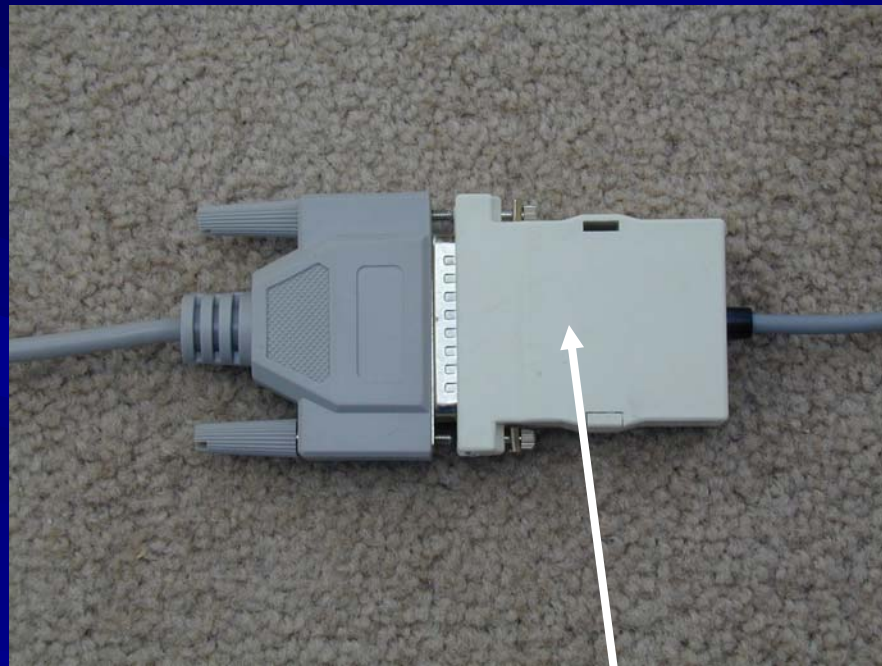


Demodulator

Connect 3-foot jumper coaxial cable from lightning arrestor to antenna connector.

Attach AC line cord to power supply.



Connect 9 pin connector (small end) of serial cable to your pc's COM port 1.

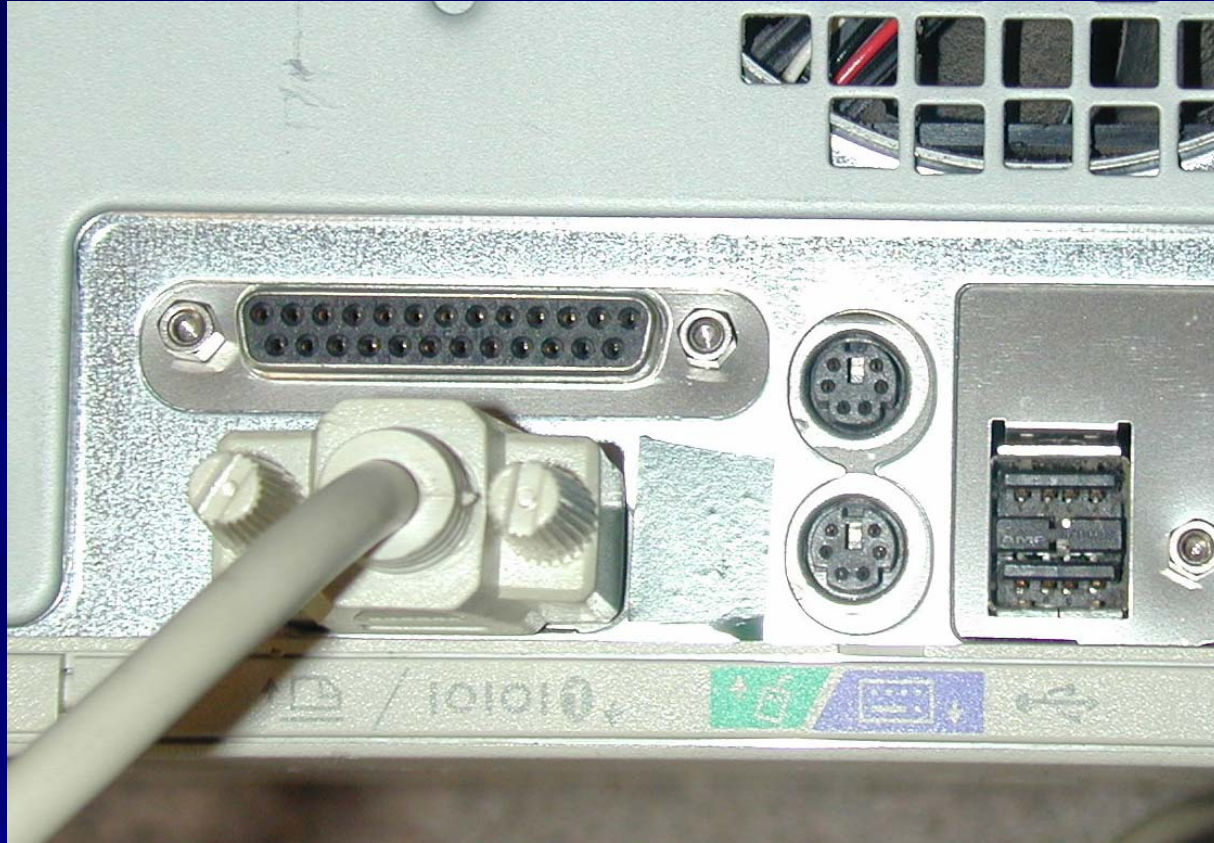

Turn unit around so front of radio is visible.

Plug in AC line cord to wall outlet.

Turn on power supply. (Red switch at lower left front of power supply.)

Power Switch



Power Supply

Select "1" on the radio.

Red LED channel indicator over "1" button will light.



Channel Indicator

"F1" button

Power Supply

Software CD

